


K4030 Shampoo Bowl Chair

Keller International, LLC. 1-800-578-8772

NOTE: All Dimensions are Outside Dimensions.

Note : Drain can be plumbed straight downward or out access door thru notching a small hole.

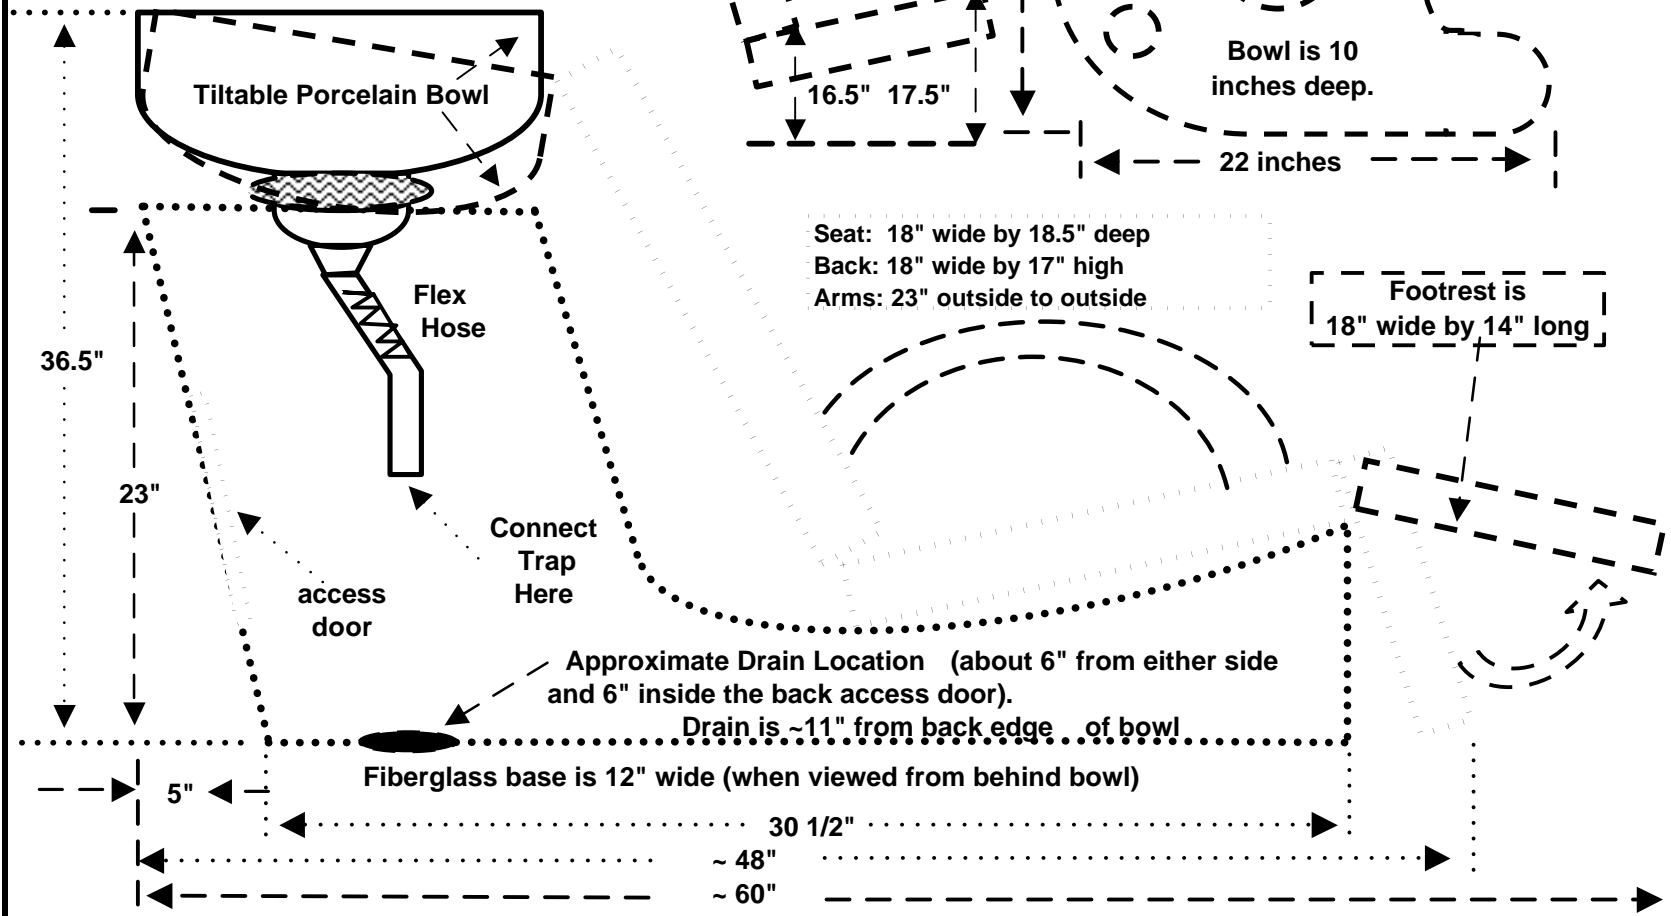

NOTE: This diagram is NOT DRAWN to scale. **The unit must be bolted to the floor.**

NOTE: There is a bolt down frame taped inside the front end of the unit. Bolt this part to your floor. Slide the unit frame under this bolt down frame. There is a slotted hole in the unit's frame in the rear for a third bolt. This will securely anchor your unit. Please call if there are any questions or problems. Thank you.

K4030 Shampoo Bowl Chair - Instructions for Installation:

NOTE: Check your local building codes. Unit must be installed by a professional plumber.

1) Unit must be securely bolted to the floor :

If bolting to a concrete floor, 3ea. concrete anchors must be installed.

If bolting to a wood floor 3ea. thru bolts, washers and nuts need to be fastened to underside of floor.

A steel bolt down plate is provided for the unit with two pre-drilled holes as an anchoring point.

Concrete anchors and bolts are not provided.

2) Plumbing requirements will vary by municipality. Check your local building codes.

The shampoo backwash station comes with the 3 1/2" drain installed and a 1 1/2 inch flexible drain hose 12 inches long. The flexhose allows the tilting bowl mechanism to function.

Plumber will have to provide local building code requirements for "P" trap, "S" trap, hair trap or any special venting if required.

If a "P" trap is used it will require a access hole out the rear of the unit or a "P" trap can be installed with an auto-vent inside the unit then exit thru the floor.

A rear exit "P" trap must be 15" or lower to floor.

Note: Plumbing needs to be securely fastened since bowl will tilt back and forth.

Hot and Cold water lines are a flexible braided hose ~ 24" in length. They may be installed inside the fiberglass base or on the outside of the unit.

The fittings are female 1/2" IPT thread with a rubber gasket.

NOTE: The access door is located on the back of the unit and is 12" H x 7" W.

3) If your unit came with Vacuum breakers they will be Watts Model N388-sc conforming to Standard 1001 of American Society Sanitary Engineers ASSE and UPC approved


Pibbs Manufacturing:

Model 0174 Flexible drain hose – made in Italy to American standard sized fittings. Standard American screw collar on both ends, 1 1/2” diameter with a collapsed length of ~14 inches.

Can be extended to 30 inches (includes gaskets).

Recommended to be used in collapsed position.

Material – heavy-duty white polypropylene with screw on metal collars.

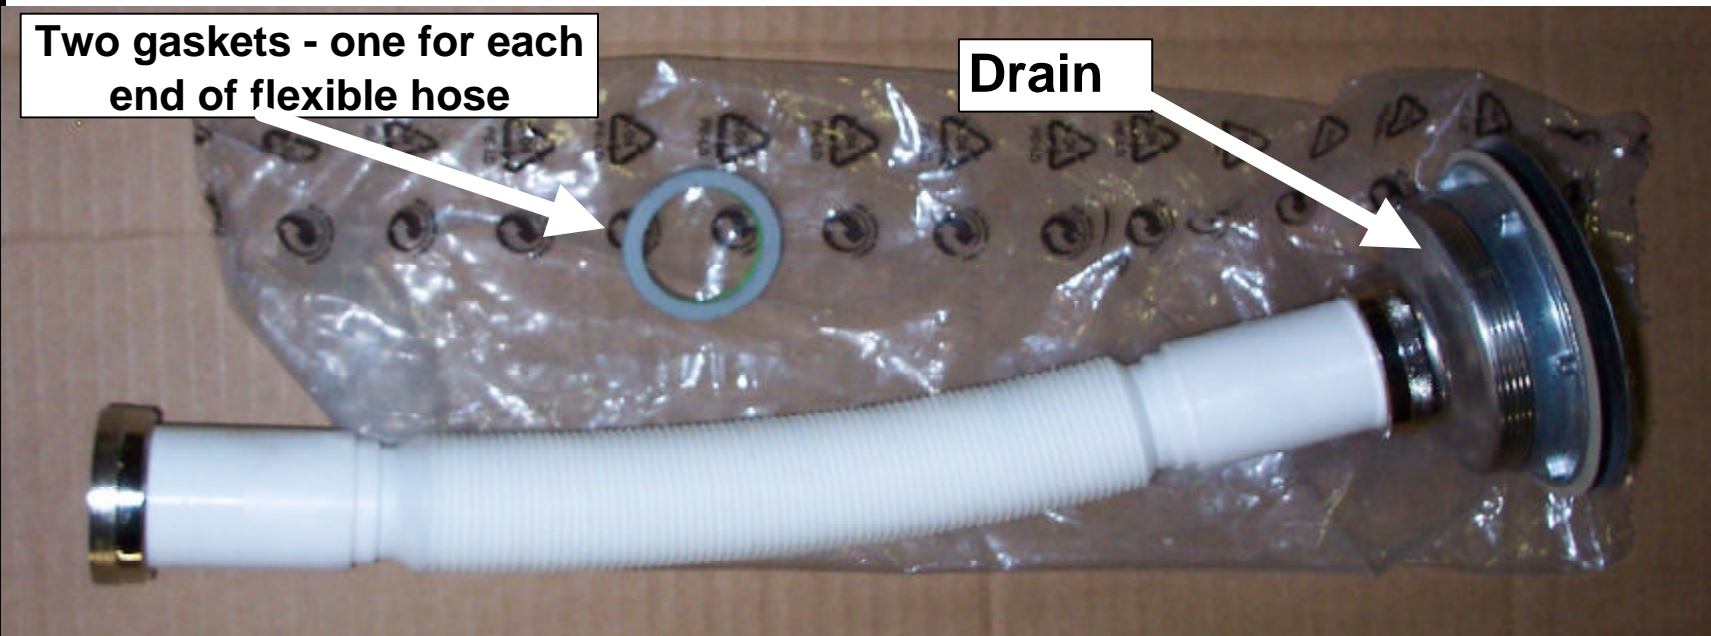

KELLER INTERNATIONAL, LLC
1431 Lake Rd, Hamlin, NY. 14464
Tele#: 1-800-578-8772
Fax#: 1-585-964-8093
www.kellerinternational.com